

VEC-603 6 Meter Antenna Tuner

General Information

The VEC-603 6 Meter Antenna Tuner for *The Magic Band* gives you low SWR with practically any coax fed antenna -- mobile whips, dipoles, verticals, vees, random wires, beams.

With low SWR, your rig will be more efficient; you'll get more power out of your 6 meter transceiver and into your antenna for more DX, it will run cooler and last longer, and your expensive transceiver will be protected from overheating due to high SWR.

The VEC-603 handles 100 Watts FM and 200 Watts SSB PEP. It works with ALL solid state and tube rigs and is perfect for home and mobile stations.

Installation

The VEC-603 installs between your 6 meter transceiver and your antenna. An external Power/SWR meter is necessary for proper operation of the VEC-603. Connect your 6 meter transceiver to your Power/SWR meter. Then connect the Power/SWR meter to the **TRANSMITTER SO-239** of the VEC-603. The coax from the antenna is then connected to the **ANTENNA SO-239** of the VEC-603.


Operation

1. Set **TRANSMITTER** and **ANTENNA** controls to **5** (capacitors half opened).
2. Apply enough transmitter power to give an adequate indication on your SWR meter. **Do not apply full power while tuning for minimum SWR!**
3. Referring to your external Power/SWR meter, adjust the **TRANSMITTER** control for a drop in SWR.
4. Adjust the **ANTENNA** control until minimum SWR is achieved.


***Note:** Since the **TRANSMITTER** and **ANTENNA** controls interact, they must be adjusted alternately until minimum SWR is obtained.*

5. After minimum SWR is achieved, check output power with a voltmeter, relative power meter or with an antenna current meter. Tune the **ANTENNA** tuner for maximum power output; *make sure SWR is at minimum.*

VEC-603 Front Panel

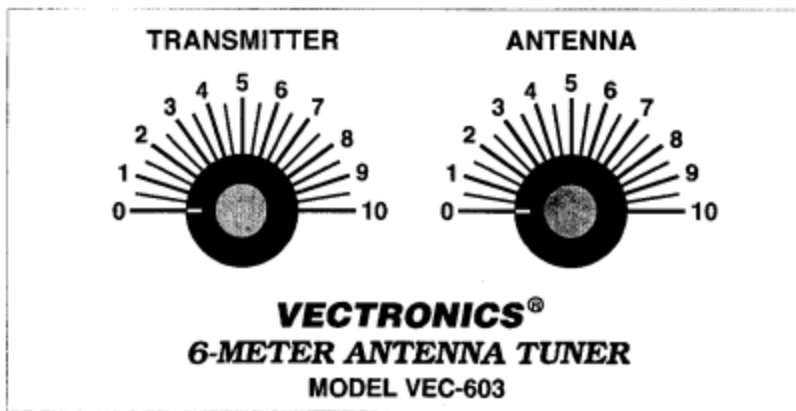


VEC-603 Rear Panel

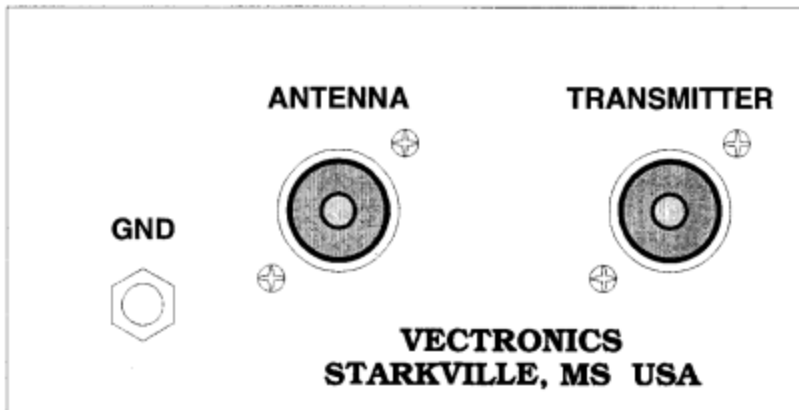


Technical Assistance

If you have any problem with this unit first check the appropriate section of this manual. If the manual does not reference your problem or your problem is not solved by reading the manual you may call *Vectronics* at **601-323-5800**. You will be best helped if you have your unit, manual and all information on your station handy so you can answer any questions the technicians may ask.

You can also send questions by mail to Vectronics, 1007 HWY 25 South, Starkville, MS 39759 or by FAX to 601-323-6551. Send a complete description of your problem, an explanation of exactly how you are using your unit, and a complete description of your station.

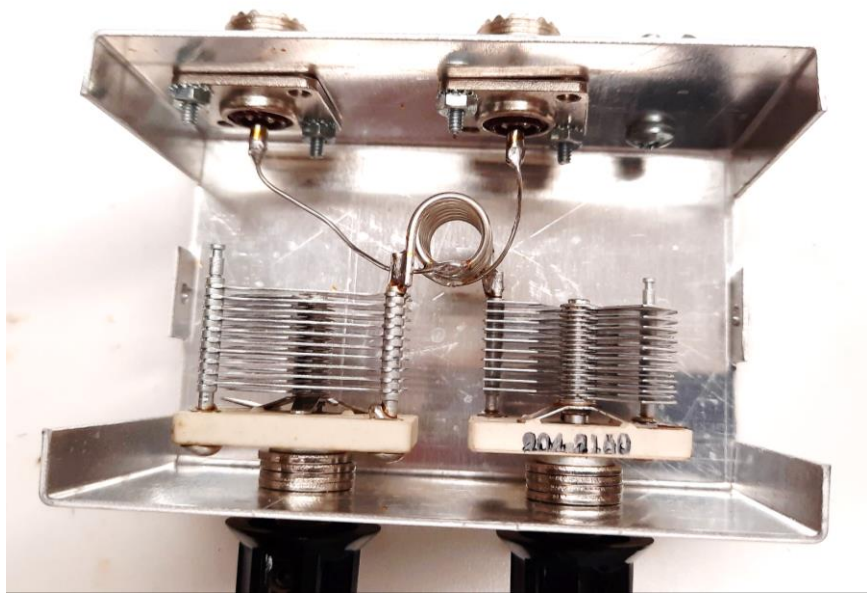

VECTRONICS VEC-603
6M ANTENNA TUNER

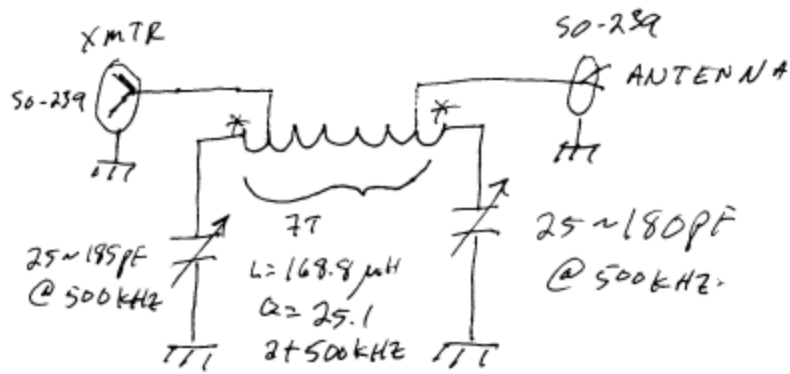

* 1T measured $\hat{=}$ 50nH @ 500kHz

NS
NØPL